



UNITEST Digital Insulation Tester 93406

Key Functions


- Insulation measurement
- Voltage measurement
- Low Ohm measurement and acoustic continuity test

General Information

- Integrated Data Hold
- Timer function (3 min.) allows measurements over a longer time period

Technical data

Display	3½ digit; LCD; 1999 Digits
Measurement ranges / Resolution	
Insulation resistance	0...199.9 MΩ / 0.1 MΩ
	0...1999 MΩ / 1 MΩ
Tolerance: (<1GΩ)	±(3% rdg.+3 Digits)
(>1GΩ)	±(5% rdg.+3 Digits)
Test voltage	250, 500, 1000 V
Test current	>1 mA
Voltage measurement	0...600 V AC / 1 V
Tolerance:	±(0.8% rdg.+3 Digits)
Low Ohm measurement	0...199.9 Ω / 0.1 Ω
Tolerance:	±(1% rdg.+2 Digits)
Safety complying with	IEC61010/EN61010/ DIN VDE 0411
	IEC61557-2/EN61557-2/ DIN VDE 0413-2
Measurement category	CAT II / 600 V
Pollution degree	2
Power supply	6 x 1.5 V, IEC LR6
Dimensions	100 x 65 x 165 mm
Weight	approx. 500 g

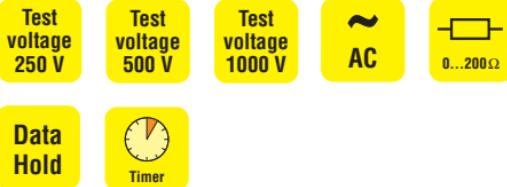

Scope of Supply:

- 1 pc UNITEST Digital Insulation Tester
- 2 pc Test Leads
- 1 pc Crocodile Clamp
- 1 pc Carrying Case
- 6 pc Batteries 1.5 V, IEC LR6
- 1 pc Instruction Manual

Order Information:

Description	Cat. No.
UNITEST Digital Insulation Tester	93406