



CE

TIN6A


FEATURES

- Microprocessor controlled.
- High quality Taut Band movement.
- Two insulation test voltages.
- Insulation resistance, auto ranging on all ranges.
- Low Battery LED indication.
- Beeper warning of external voltage.
- Fully protected : crow bar.
- Housed in heavy-duty carry case.


SPECIFICATIONS

Model	TIN6A	
Test Voltage (DC V)	5000V	10000V
Measuring Ranges	0-200GΩ	0-400GΩ
Accuracy	±5% of full scale	
Live Warning	>500 Volts AC	
Operating-Temperature	0° C to 40° C	
Operating-Humidity	85% Max. relative humidity	
Weight	3500g (battery included)	
Dimensions	330(L) x 260(W) x 160(D)mm	
Power Source	1.5V "C" x 8 Alkaline Batteries	
Accessories	Test leads (AL-50+AL-30+AL-30C) Instruction manual Batteries	


● Measuring Insulation of Open Contacts of Circuit Breaker.

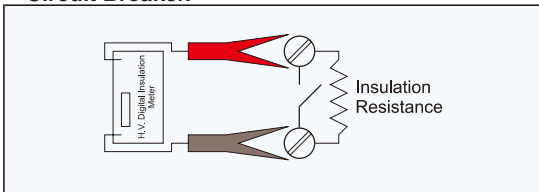

● Insulator

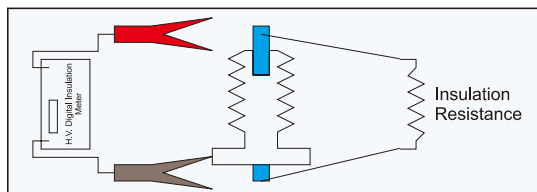

● Measuring Insulation between contacts of Circuit Breaker.

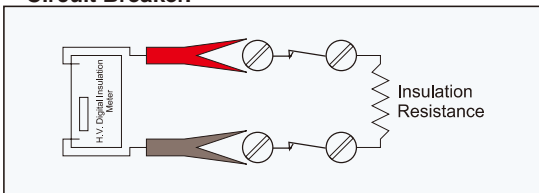

● Insulator on Railway Coach

